



Rivnut
Fastening Systems


1300 887 341
sales@rivnut.com.au
Unit 3, 57 Boyland Avenue,
Coopers Plains, Qld 4108

Rivnut Large Flange Steel - Euro

Material Low Carbon Steel
Finish Zinc Plated



Optimal for high push-out applications. Straight metric hole sizes. Splined body improves torque-to-turn resistance

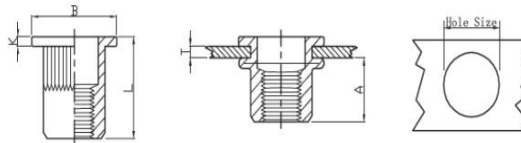

| Part Number | Thread | Grip Range | Hole Size | A | B | L | K |
|--------------|--------|------------|-----------|-------|-------|-------|------|
| RNLFSSSE03 | M3 | 0.5-2.0 | 5 | 6.00 | 8.00 | 10.00 | 0.80 |
| RNLFSSSE04 | M4 | 0.5-2.5 | 6 | 6.00 | 9.00 | 10.50 | 0.80 |
| RNLFSSSE04-L | M4 | 2.5-4.0 | 6 | 6.00 | 9.00 | 12.00 | 0.80 |
| RNLFSSSE05 | M5 | 0.7-3.0 | 7 | 7.50 | 10.00 | 13.00 | 1.00 |
| RNLFSSSE05-L | M5 | 2.5-4.0 | 7 | 8.50 | 10.00 | 16.50 | 1.00 |
| RNLFSSSE06 | M6 | 0.5-3.0 | 9 | 9.20 | 12.30 | 15.50 | 1.30 |
| RNLFSSSE06-L | M6 | 3.0-5.0 | 9 | 10.50 | 12.30 | 19.50 | 1.30 |
| RNLFSSSE08 | M8 | 1.0-3.0 | 11 | 11.50 | 14.50 | 18.50 | 1.50 |
| RNLFSSSE08-L | M8 | 3.0-5.5 | 11 | 11.50 | 14.50 | 21.00 | 1.50 |
| RNLFSSSE10 | M10 | 1.0-4.0 | 13 | 13.50 | 17.00 | 21.50 | 1.70 |
| RNLFSSSE10-L | M10 | 4.5-6.0 | 13 | 13.50 | 17.00 | 24.00 | 1.70 |
| RNLFSSSE12 | M12 | 1.0-4.0 | 16 | 13.50 | 18.00 | 22.00 | 2.00 |
| RNLFSSSE12-L | M12 | 4.0-7.0 | 16 | 16.00 | 18.00 | 28.00 | 2.00 |

| Thread Size | Pull-Out KN | Push-Out KN | Maximum Torque NM |
|-------------|-------------|-------------|-------------------|
| M3 | 3.00 | 1.80 | 1.50 |
| M4 | 3.60 | 2.90 | 5.10 |
| M5 | 7.80 | 4.20 | 7.90 |
| M6 | 10.80 | 6.50 | 12.40 |
| M8 | 12.50 | 7.90 | 32.00 |
| M10 | 17.30 | 10.70 | 45.00 |

Dimensions and specifications are subject to change without notice.

www.rivnut.com.au