



Rivnut
Fastening Systems


1300 887 341
sales@rivnut.com.au
Unit 3, 57 Boyland Avenue,
Coopers Plains, Qld 4108

Rivnut Small Flange Aluminium

Material Aluminium
Finish Chemically Brightened



Optimal for high push-out applications. Straight metric hole sizes. Splined body improves torque-to-turn resistance

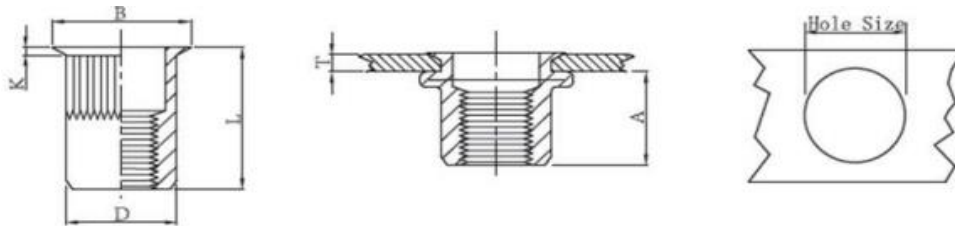

Part Number	Thread	Grip Range	Hole Size	A	B	L	K
RNFFA0315	M3	0.5-1.5	5	5.00	8	9.00	0.50
RNFFA0420	M4	0.8-2.5	6	6.00	9	10.50	0.50
RNFFA0525	M5	0.8-2.5	7.5	7.50	10	11.50	0.50
RNFFA0625	M6	1.0-2.5	9.2	9.20	12.5	14.00	0.60
RNFFA0640	M6	2.5-4.0	9.2	9.20	12.5	14.00	0.65
RNFFA0825	M8	1.0-2.5	10.2	10.20	14.5	15.50	0.65
RNFFA0840	M8	2.5-4.0	10.8	10.20	14.5	15.50	0.65
RNFFA10	M10	1.0-4.0	11.5	11.50	16.5	17.70	0.70

Thread Size	Pull-Out		Maximum Torque NM
	KN	KN	
M3	3.00	0.60	1.20
M4	3.70	0.07	3.60
M5	5.40	0.80	5.30
M6	8.50	0.90	10.80
M8	12.30	1.00	23.00
M10	15.60	1.10	28.00

Dimensions and specifications are subject to change without notice.

www.rivnut.com.au