




Stainless Steel Orlock Rivets - Dome Head

Material: **Body:** 304 Stainless Steel
 Mandrel: 304 Stainless Steel
 Finish: Natural

Orlock Rivets feature a unique dual locking system ideal for applications that require high resistance to vibration, increased shear strength and a weather tight finish. Designed to form a bulb on the blindside, this distinctive feature increases load spread, prevents pull through and is widely used when securing Thick-to-Thin components or sheet type products. Available in a wide combination of diameters, grip ranges and materials.

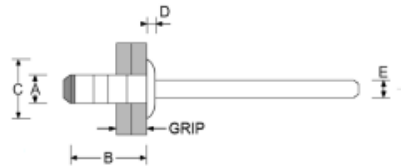

Part Number	Grip Range	Hole Size	A	B	C	D	E	Shear	Tensile
BLDU-06090	1.50-3.50	4.90-5.10	4.80	9.00	9.80	2.20	3.02	6.08	5.00
BLDU-06115	3.50-6.00	4.90-5.10	4.80	11.50	9.80	2.20	3.02	6.08	5.00
BLDU-06140	6.00-8.50	4.90-5.10	4.80	14.00	9.80	2.20	3.02	6.08	5.00
BLDU-06165	8.50-11.0	4.90-5.10	4.80	16.50	9.80	2.20	3.02	6.08	5.00
BLDU-08105XG	2.00-4.50	6.60-6.70	6.40	10.50	13.00	3.00	4.17	14.10	8.33
BLDU-08125XG	4.00-6.50	6.60-6.70	6.40	12.50	13.00	3.00	4.17	14.10	8.33
BLDU-08145XG	5.00-8.50	6.60-7.0	6.40	14.50	13.00	3.00	4.17	14.10	8.33
BLDU-08165XG	7.00-10.5	6.60-6.70	6.40	16.50	13.00	3.00	4.17	14.10	8.33
BLDU-08185XG	9.00-12.5	6.60-6.70	6.40	18.50	13.00	3.00	4.17	14.10	8.33
BLDU-08205XG	11.0-14.5	6.60-6.70	6.40	20.50	13.00	3.00	4.17	14.10	8.33
BLDU-08225XG	13.0-16.0	6.60-6.70	6.40	22.50	13.00	3.00	4.17	14.10	8.33
BLDU-10135XG	4.00-7.00	8.00-8.30	7.80	13.50	16.00	3.80	5.12	20.10	12.70
BLDU-10165XG	7.00-10.0	8.00-8.30	7.80	16.50	16.00	3.80	5.12	21.50	12.70
BLDU-10195XG	10.0-13.0	8.00-8.30	7.80	19.50	16.00	3.80	5.12	21.50	12.70
BLDU-10225XG	13.0-16.0	8.00-8.30	7.80	22.50	16.00	3.80	5.12	21.50	12.70

Dimensions and specifications are subject to change without notice. Check your distributor for the latest data sheet. The test data provides approximate strength values averaged in multiple tests in various materials and thicknesses