




Steel Orlock Rivets - Dome Head

Material: Low Carbon Steel
Body: Carbon Steel
Mandrel: Zinc Plated
Finish: Zinc Plated

Orlock Rivets feature a unique dual locking system ideal for applications that require high resistance to vibration, increased shear strength and a weather tight finish. Designed to form a bulb on the blindside, this distinctive feature increases load spread, prevents pull through and is widely used when securing Thick-to-Thin components or sheet type products. Available in a wide combination of diameters, grip ranges and materials.

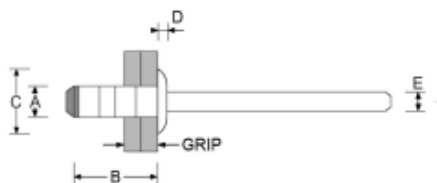

Part Number	Grip Range	Hole Size	A	B	C	D	E	Shear	Tensile
BLDRC-0611-F	1.50-3.50	5.10	4.80	9.00	10.00	1.50	3.20	3.40	3.80
BLDRC-0614-F	3.50-6.00	5.10	4.80	12.00	10.00	1.50	3.20	5.10	3.80
BLDRC-0618-F	6.00-8.50	5.10	4.80	15.00	10.00	1.50	3.20	7.00	3.80
BLDR-08105XG	2.00-4.50	6.70-6.90	6.50	10.50	13.00	3.00	4.20	10.80	7.90
BLDR-08125XG	3.00-6.50	6.70-6.90	6.50	12.50	13.00	3.00	4.20	12.20	7.90
BLDR-08145XG	5.00-8.50	6.70-6.90	6.50	14.50	13.00	3.00	4.20	13.70	7.90
BLDR-08165XG	7.00-10.5	6.70-6.90	6.50	16.50	13.00	3.00	4.20	14.20	7.90
BLDR-08185XG	9.00-12.5	6.70-6.90	6.50	18.50	13.00	3.00	4.20	15.40	7.90
BLDR-08205XG	11.0-14.5	6.70-6.90	6.50	20.50	13.00	3.00	4.20	15.40	7.90
BLDR-08225XG	13.0-16.5	6.70-6.90	6.50	22.50	13.00	3.00	4.20	15.40	7.90
BLDR-10135XG	4.00-7.00	8.00-8.30	7.80	13.50	16.00	3.70	5.12	13.80	9.10
BLDR-10165XG	7.00-10.0	8.00-8.30	7.80	16.50	16.00	3.70	5.12	15.70	9.10
BLDR-10195XG	10.0-13.0	8.00-8.30	7.80	9.50	16.00	3.70	5.12	15.70	9.10
BLDR-10225XG	13.0-16.0	8.00-8.30	7.80	22.50	16.00	3.70	5.12	15.70	9.10
BLDR-10255XG	16.0-19.0	8.00-8.30	7.80	25.50	16.00	3.70	5.12	15.70	9.10
BLDR-10285XG	19.0-22.0	8.00-8.30	7.80	28.50	16.00	3.70	5.12	15.70	9.10

Dimensions and specifications are subject to change without notice. Check your distributor for the latest data sheet. The test data provides approximate strength values averaged in multiple tests in various materials and thicknesses