




### Structural Rivet Aluminium Mono Lock Series

**Material:** Aluminium  
**Finish:** Clear Chromate

Optimal for applications of varying thickness requiring high shear and tensile strengths. The dual locking grooves on the mandrel provide excellent resistance to vibration as well as impressive shear strength and weather resistance. This rivet offers excellent hole fill, generous grip range, pressure tight seal, and flush breaking mandrel regardless of material thickness.

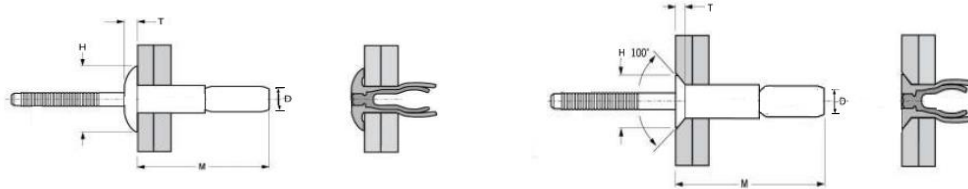

Part Number	Dia (D)	Hole Size	Length (M)	Grip Range	Head Dia (H)	Head Thickness (T)	Strength KN	
							Shear	Tensile
SRIAA-0604	4.8	4.9-5.1	18.2	1.6-6.9	10.1	2.2	2.7	2.2
SRIAA-0607			24.6	1.6-11.1				
SRIAA-0806	6.4	6.7-6.9	25.3	2.0-9.5	13.4	3.0	5.8	4
SRIAA-0810			35.6	2.0-15.9				
SRIAA-1212	9.5	9.9-10.3	41.91	3.05-15.8	20.1	4.47	13.1	8.4

SRTR-Structural Rivet Aluminium Mono Lock Series - Large Flange Head								
SRTB-0604	4.8	4.9-5.1	18.2	1.6-6.9	12.7	1.9	2.66	2.22
SRTB-0607			24.6	1.6-11.1				

SR100 - Aluminium Body / Mandrel 100° Countersunk Head								
SRIAAC-0606	4.8	4.9-5.1	20.0	3.2-8.4	8.8	1.8	2.7	2.2
SRIAAC-0608			20.4	7.7-12.7				
SRIAAC-0807	6.4	6.7-6.9	20.7	4.1-12.1	2	11.2	5.8	4.0
SRIAAC-0812			37.0	10.6-18.4				

Dimensions and specifications are subject to change without notice. Check your distributor for the latest data sheet. The test data provides approximate strength values averaged in multiple tests in various materials and thicknesses.