



Rivnut
Fastening Systems


1300 887 341
sales@rivnut.com.au
Unit 3, 57 Boyland Avenue,
Coopers Plains, Qld 4108

Rivnut Large Flange Aluminium

Material Aluminium
Finish Chemically Brightened



Optimal for high push-out applications. Straight metric hole sizes. Splined body improves torque-to-turn resistance

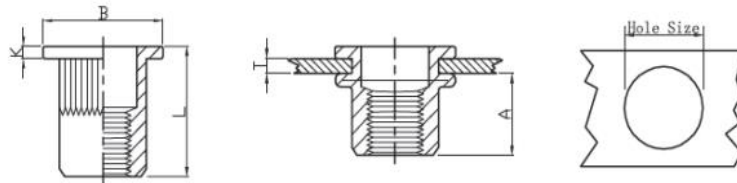

Part Number	Thread	Grip Range	Hole Size	A	B	L	K
RNLFA0315	M3	0.5-1.5	5	5.00	8.00	9.80	0.80
RNLFA0420	M4	0.8-2.5	6	6.00	9.00	11.30	0.80
RNLFA0525	M5	0.8-2.5	7	7.50	10.00	12.50	1.00
RNLFA0625	M6	1.0-2.5	9	9.20	12.50	15.10	1.50
RNLFA0640	M6	2.5-4.0	9	9.20	12.50	16.50	1.50
RNLFA0825	M8	1.0-2.5	11	10.20	14.50	16.50	1.50
RNLFA0840	M8	2.5-4.0	11	10.20	14.50	18.00	1.50
RNLFA1025	M10	1.0-4.0	13	11.50	16.50	18.00	1.50

Thread Size	Pull-Out		Maximum Torque NM
	KN	KN	
M3	3.00	0.90	1.20
M4	4.00	1.00	3.60
M5	5.00	1.50	5.30
M6	8.00	2.00	10.80
M8	11.00	2.50	23.00
M10	13.00	4.00	28.00

Dimensions and specifications are subject to change without notice.

www.rivnut.com.au