




Stainless Hexagon Closed End Rivnut

Material: Stainless Steel SS304

Low profile head, used in conjunction with a metric hexagon hole to give maximum resistance to applied torque or unscrewing torque. For applications where sealing to prevent the ingress of solids or moisture is desirable.

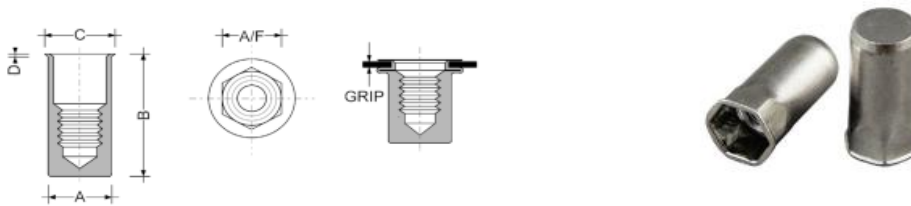

Thread Size	Part Number	Grip Range	Hole Size	A	B	C	D	Pull Out	Push Out	Maximum Torque
M4	HEX-SSFE-0425-CE	0.5-2.5	6.1	6.0	16.0	7.0	0.5	7.4	2	4.9
M5	HEX-SSFE-0530-CE	0.5-3.0	7.1	7.0	18.0	8.0	0.5	11.8	2.5	9.8
M6	HEX-SSFE-0630-CE	0.5-3.0	9.1	9.0	21.0	10.0	0.5	22.6	3.4	14.7
M8	HEX-SSFE-0830-CE	0.5-3.0	11.1	11.0	23.5	12.0	0.5	27.5	3.9	44.1
	HEX-SSFE-0855-CE	3.0-5.5	11.1	11.0	26.0	12.0	0.5	27.5	3.9	44.1
M10	HEX-SSFE-1035-CE	1.5-3.5	13.1	13.0	26.5	14.2	0.5	31.4	4.4	

Dimensions and specifications are subject to change without notice. Check your distributor for the latest data sheet. The test data provides approximate strength values averaged in multiple tests in various materials and thicknesses. We recommend testing your application when an exact strength figure is required, or the load to be applied comes close to the published data.